HOLLOW METAL DOORS & FRAMES COMMERCIAL WOOD DOORS COMMERCIAL HARDWARE

COMMERCIAL HOLLOW METAL DOORS



Flush Metal Door



Metal Double Doors



2-Panel Metal Door high def. embossed 2-panel design



Metal Fire Door



Metal Door w/ Glass



Metal Building Door preassembled, painted



Louvered Metal Door with steel louver (air vent)



6-Panel Metal Door embossed 6-panel design



Dutch Door shelfs available

FOR MORE INFORMATION CONTACT GARETH 778-855-5777 2620 CENTRE AVE, CALGARY, AB T2A 2L3, CANADA



Max-Duty Door & Frame

Level 4 – 14-gauge door




Stainless Steel Door

SS304 #4 - includes frame



GRAINTECH™ Door

wood-look steel door

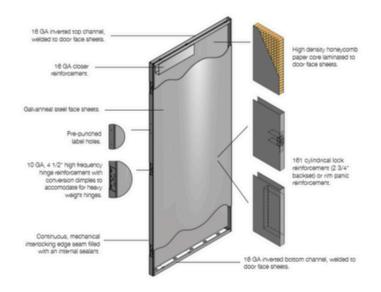

LS Series (Lock Seam)


Commercial, industrial, institutional and residential high rise buildings


- Standard seam door
- Available at 20, 18, and 16 GA
- 1 3/4" in standard thickness
- Standard high density honeycomb core
- Standard 3 hinge preparation
- 🖒 Standard 161 Cylindrical Lock or standard Rim Panic Reinforced

UV Series (Universal Lock Seam)

Commercial, industrial, institutional and residential high rise buildings

- Universal lock seam door
- Available at 20 and 18 GA
- 1 3/4" in standard thickness
- Standard high density honeycomb core
- Hinge and Lock designed to be used as either LH/RH door
- Standard 161 Cylindrical Lock or standard Rim Panic Reinforced



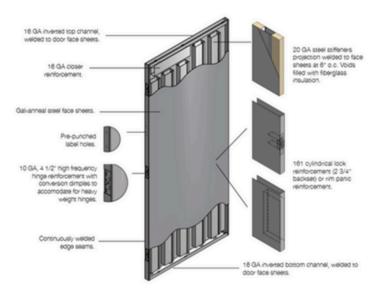

CW Series (Continuously Welded)


Banks, Police stations, detection facilities and schools


- Continuously welded seam
- Available at 16 and 14 GA
- 1 3/4" in standard thickness
- Standard high density honeycomb core
- Standard 3 hinge preparation
- Standard 161 Cylindrical Lock or standard Rim Panic Reinforced

EP Series (Embossed Panel)

Beauty and elegance. Commercial offices and high end residential applications

- Standard seam door
- Available at 20 and 18 GA
- 1 3/4" in standard thickness
- Standard polystyrene core
- Standard 3 hinge preparation
- 🖒 Standard 161 Cylindrical Lock or standard Rim Panic Reinforced
- 🖒 6-panel (EP6), 6-panel (EPN6) Narrow, 2-panel (EPS2) Sqaure, or 2-panel (EPA2) Arched





Visioneer Series (Engineered Options)

- for Engineered for Efficiency & Strength Ideal for Exterior Applications
- Standard seam door
- Available at 18 and 16 GA
- 1 3/4" in standard thickness
- Laminated steel stiffeners stuffed with high density mineral wool (ROXUL) core on lock and hinge side.
- Polyurethane insulation slab used for the middle core
- Standard 3 hinge preparation
- 🖒 Standard 161 Cylindrical Lock or standard Rim Panic Reinforced
- Seamless edges for aesthetic look

COMMERCIAL WOOD DOORS



Paint Grade Wood Door solid core MDF, primed white



Stain Grade Wood Door unfinished, various grain options



Prefinished Wood Door various color & grain options



Economy Prefinished Door
3 grain/color options, painted edges



Mineral Core Fire Door 45, 60, or 90-minute fire-rated



Wood Door With Glass
with vision lite kit





Wood Door With Louver provides air ventilation



Mineral Core Fire Door 45, 60, or 90-minute fire-rated

COMMERCIAL DOOR HARDWARE































Protection Plates and Kickplates

Door Stops and Holders